



C0235T - Lincat Convactor Touch Electric Counter-top Convection Oven - W 810 mm - D 850 mm - 4.7 kW

Able to roast, braise, bake and reheat, a C0235T Convector convection oven is a powerful addition to any commercial kitchen.

- ✓ 3 x GN1/1 capacity
- ✓ Touchscreen control with easy-to-use icon-driven menu selections
- ✓ Easy-view traffic light status - see the status of the oven at a glance, even in the noisiest kitchens
- ✓ Space for 24 programs with up to four stages, which can be adjusted individually
- ✓ Up to four-stage phased cooking for perfect results - set temperature, time, fan speed and humidity injection for each stage
- ✓ Even heat distribution thanks to electronically controlled two-speed, bi-directional fan
- ✓ Five levels of humidity injection
- ✓ Nine-hour on-screen timer, with electronic buzzer, and flashing oven lamps to indicate that cycle has finished

Specifications

Summary

| | |
|-----------------------------|-----------------------------------|
| Range Name | Convactor |
| Power Type | Electric |
| Unit Type | Counter-top |
| Available in UK Only | No |
| UK Warranty | 2 Years Parts and Labour Warranty |
| Export Warranty | Contact your local dealer |
| GTIN Code | 5056105118299 |

Power and Performance

| | |
|-----------------------------|------------|
| Gastronorm Capacity | 3 x GN1/1 |
| Total Power kW | 4.8 |
| Temperature Range °C | 30-260 |
| IP Rating | IP23 |
| Temperature Control | Electronic |
| Oven Rating kW | 4.6 |

Key Specifications

| | |
|-----------------------------------|--------------|
| Capacity Litres | 96 |
| Number of Shelves included | 3 |
| Number of Shelf Positions | 3 |
| Type of Lighting | Halogen Bulb |

Weights and Dimensions

| | |
|----------------------------------|-----|
| Unit Height (External) mm | 645 |
| Unit Width (External) mm | 810 |
| Unit Depth (External) mm | 850 |
| Height (Internal) mm | 308 |
| Width (Internal) mm | 690 |
| Depth (Internal) mm | 470 |
| Shelf Dimensions Width mm | 660 |
| Shelf Dimensions Depth mm | 425 |
| Net Weight Kg | 82 |




Supply Connections

| | |
|---------------------------------------|--------------------------|
| Requires Installation | Yes |
| Requires Electrical Supply | Yes |
| UK 3 Pin Plug | No |
| Requires Hardwiring | Yes |
| Electrical Supply Rating Watts | 4800 |
| Single Phase Amps | 20.5 |
| Single Phase Voltage | 240 |
| Three Phase Amps | L1=6.9 ; L2=6.9 ; L3=6.9 |
| Three Phase Voltage | 400 |
| Water Connection Pressure Bar | 2-6 |
| Drain Connection | No |
| Water Connection | 3/4" |

Shipping

| | |
|-------------------------|------|
| Packed Weight Kg | 94.1 |
| Packed Height cm | 81.8 |
| Packed Width cm | 88 |
| Packed Depth cm | 100 |

Technical Picture

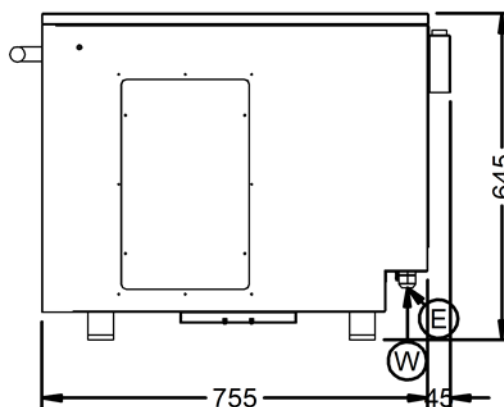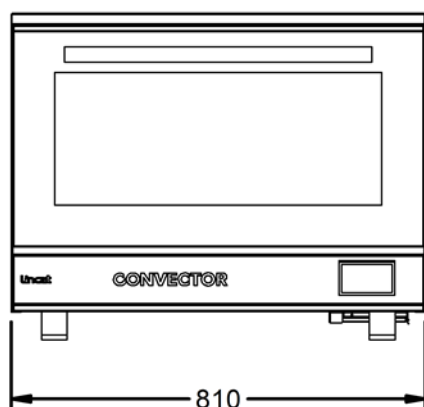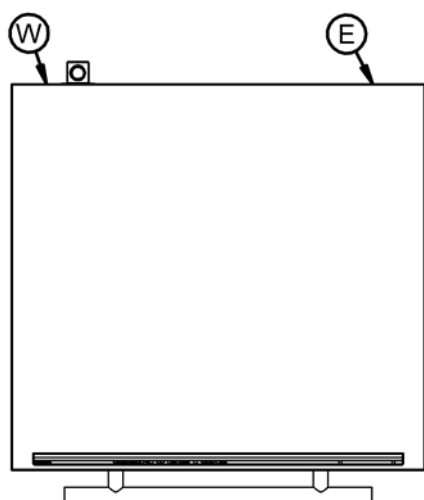

Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 503250
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm